



# Signage Display

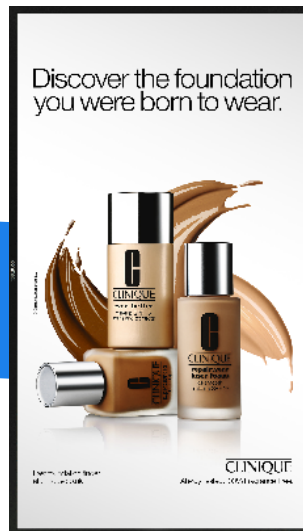

## SPECIFICATIONS

SKU	CBD43A8-3YSL	CBD55A8-3YSL	CBD65A8-3YSL	CBD75A8-3YSL	CBD86A8-3YSL	CBD98A8-3YSL
Model	Display V4 43"	Display V4 55"	Display V4 65"	Display V4 75"	Display V4 86"	Display V4 98"
<b>DISPLAY</b>						
Aspect Ratio	16:9	16:9	16:9	16:9	16:9	16:9
Brightness	350cd/m <sup>2</sup>	350cd/m <sup>2</sup>	400cd/m <sup>2</sup>	450cd/m <sup>2</sup>	450cd/m <sup>2</sup>	500cd/m <sup>2</sup>
Panel Technology	D-LED	D-LED	D-LED	D-LED	D-LED	D-LED
Native Resolution	3840 x 2160 (UHD)	3840 x 2160 (UHD)	3840 x 2160 (UHD)	3840 x 2160 (UHD)	3840 x 2160 (UHD)	3840 x 2160 (UHD)
Refreshing Freq.	60Hz	60Hz	60Hz	60Hz	60Hz	120Hz
Viewing Angle	178 degrees	178 degrees	178 degrees	178 degrees	178 degrees	178 degrees
Lifetime	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait
<b>CONNECTIVITY</b>						
HDMI In	1	1	1	1	1	1
DP In	1	1	1	1	1	1
VGA In	1	1	1	1	1	1
DVI-D	1	1	1	1	1	1
BNC In	1	1	1	1	1	1
Audio In	1	1	1	1	1	1
LAN In	1	1	1	1	1	1
USB 2.0 In	2	2	2	2	2	2
OPS Slot	0	0	1	1	1	1
RS232	1	1	1	1	1	1
Audio Out	1	1	1	1	1	1
SPDIF	1	1	1	1	1	1
<b>ENVIRONMENTAL CONDITIONS</b>						
Operation Temp.	0 to 40 degrees	0 to 40 degrees	0 to 40 degrees	0 to 40 degrees	0 to 40 degrees	0 to 40 degrees
Operation Humidity	20 - 85%	20 - 85%	20 - 85%	20 - 85%	20 - 85%	20 - 85%


# Signage Display

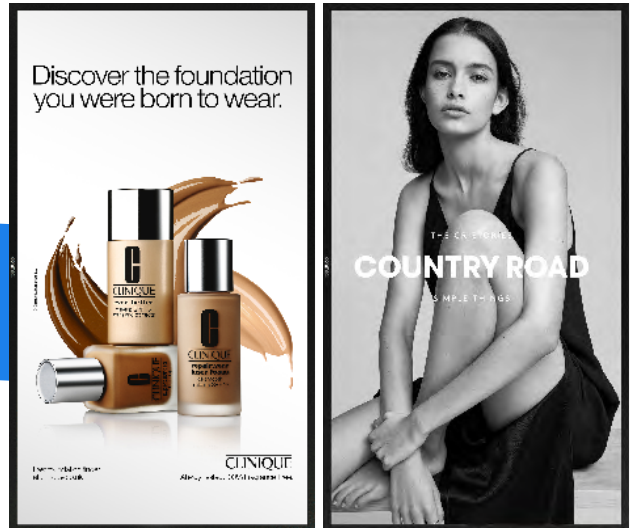

## SPECIFICATIONS

SKU	CBD43A8-3YSL	CBD55A8-3YSL	CBD65A8-3YSL	CBD75A8-3YSL	CBD86A8-3YSL	CBD98A8-3YSL
Model	Display V4 43"	Display V4 55"	Display V4 65"	Display V4 75"	Display V4 86"	Display V4 98"
<b>POWER</b>						
Power Supply	240V	240V	240V	240V	240V	240V
Power Consumption	≤85 W	≤85 W	≤85 W	≤85 W	≤85 W	≤85 W
- Typical						
Power Consumption	<0.5W	<0.5W	<0.5W	<0.5W	<0.5W	<0.5W
- Standby						
Audio Output Power	2x15W	2x15W	2x15W	2x15W	2x15W	2x15W
<b>OPERATING SYSTEM</b>						
Software	Android 8	Android 8	Android 8	Android 8	Android 8	Android 8
RAM	2GB	2GB	2GB	2GB	2GB	2GB
Storage	16GB	16GB	16GB	16GB	16GB	16GB
Processor	1.5GHz	1.5GHz	1.5GHz	1.5GHz	1.5GHz	1.5GHz
	Quad Core	Quad Core	Quad Core	Quad Core	Quad Core	Quad Core
	ARM A73+A53	ARM A73+A53	ARM A73+A53	ARM A73+A53	ARM A73+A53	ARM A73+A53
GPU	MaliG51	MaliG51	MaliG51	MaliG51	MaliG51	MaliG51
<b>PHYSICAL</b>						
Bezel	Black	Black	Black	Black	Black	Black
Bezel Width	13mm	13.9mm	23.1mm	19.4mm	19.4mm	21.5mm
Dimensions	969.9(W) x 84.6(D) x 558.3 (H)mm	1243.2(W) x 74.8(D) x 714(H)mm	1476.7 (W) x 79.8 (D) x 851.7 (H)mm	1692.5 (W) x 79.6 (D) x 970.7 (H)mm	1937.8 (W) x 79.6(D) x 1108.8 (H)mm	2204.85 (W) x 101.7 (D) x 1260.35 (H)mm
Weight	12.5kg	17.5kg	31.5kg	42kg	58.5kg	80kg
VESA Mount	400 x 200	400 x 400	600 x 400	800 x 400	800 x 600	800 x 600
Packed Dimensions	1070(W) x 153(D) x 663(H)mm	1364 (W) x 154 (D) x 824 (H)mm	1660 (W) x 245 (D) x 1045 (H)mm	1880 (W) x 245 (D) x 1125 (H)mm	2125 (W) x 275 (D) x 1275 (H)mm	2525 (W) x 435 (D) x 1750 (H)mm
Packed Weight	16kg	22.5kg	42.5kg	52kg	78.5kg	132.8kg

# Signage Display

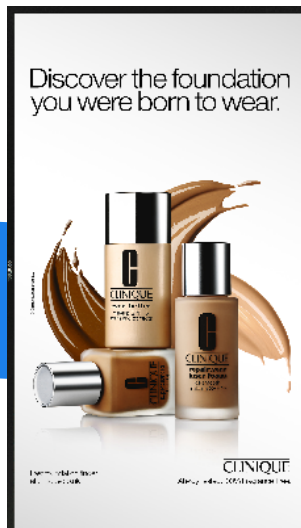

## SPECIFICATIONS

SKU	CBD43A8-3YSL	CBD55A8-3YSL	CBD65A8-3YSL	CBD75A8-3YSL	CBD86A8-3YSL	CBD98A8-3YSL
Model	Display V4 43"	Display V4 55"	Display V4 65"	Display V4 75"	Display V4 86"	Display V4 98"

### WHAT'S IN THE BOX

Built In	Wifi 5 Browser - Chrome Training CommBox Store CommBox Connect powered by Airserver or EShare CommBox Signage - 3 Year Licence CommBox Manage - Optional 7 year licence (to be purchased separately)
----------	--

Accessories	2 x AAA Batteries 1 x Remote 1 x Powercord (1.5M for 43", 3M for all other screen sizes) 1 x 3M HDMI Cable 1 x Wall Mount**
-------------	---

### COMMBOX EXPERIENCE

Warranty	5 Year Warranty
Support	Same business day help desk support

\*\* NOTE: 43" and 55" wall mount brackets are keyhole type, 65" and above are standard VESA wall brackets